


ULTRA SEAL XLA® II (Accelerator)

M&D Industries of Louisiana, Inc. · P.O. Box 82007 · Lafayette, Louisiana 70598 USA
www.ultrasealinc.com Phone number: +1.337.984.0471

Product Description:

Ultra Seal® XLA II is an accelerating agent to control pump time for Poly Plug® slurries. The concentration of Ultra Seal® XLA II is dependent on static bottom hole temperature.

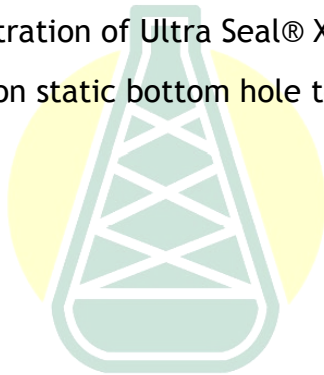

Physical Form:	Dry
Color:	Green
Odor:	None
Solubility in Water:	Soluble
Density:	2.3 gm/cm ³
Packaging:	15 Lb Pail

Guidelines:

60°F = 0.5 to 1 ppb of mix water

70°F = 0.25 to 0.5 ppb of mix water

80°F = 0.1 to 0.25 ppb of mix water

90°F = Up to 0.1 ppb of mix water

100°F and Above = Generally Not Required

M&D INDUSTRIES
OF LOUISIANA