


ULTRA SEAL XLR® (DELAYING AGENT)

M&D Industries of Louisiana, Inc. · P.O. Box 82007 · Lafayette, Louisiana 70598 USA
www.ultrasealinc.com Phone number: +1.337.984.0471

Product Description:

Ultra Seal® XLR is a delaying agent and is used to control pump time for Poly Plug® slurries.

The concentration of Ultra Seal® XLR is dependent on static bottom hole temperature.

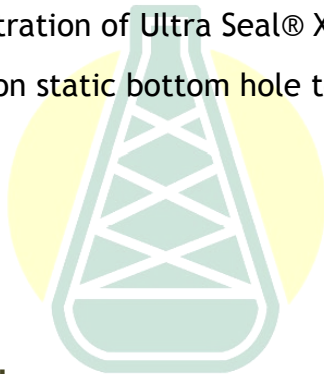

Physical Form:	Liquid
Color:	Clear
Odor:	Slight
Solubility in Water:	Soluble
Density:	10.9-11.1 ppg
Packaging:	5 Gallon Pail

Guidelines:

100°F = 1 to 3 ppb of mix water

150°F = 6 to 8 ppb of mix water

200°F = 10.5 to 15.6 ppb of mix water

250°F = 15.6 to 25 ppb of mix water

300°F = 25 to 40 ppb of mix water

M&D INDUSTRIES
OF LOUISIANA

